Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number
132636

PICProto3 Prototyping Board

Copyright ©2002 microEngineering Labs, Inc.

- High quality double-sided board
- Solder mask both sides
- More than 500 plated-through holes
- 4 mounting holes
- Overall dimensions 3" X 3"

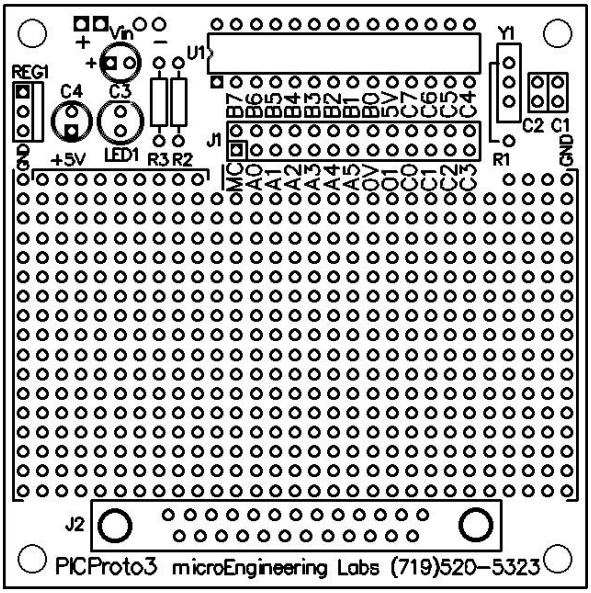

U1 - PIC16C62, 63, 641, 642, 66, 72, 73 or 76
Y1 - crystal or ceramic resonator
C1, 2 - crystal capacitors
C3 - input capacitor
C4 - bypass capacitor
REG1 - 5 volt regulator
LED1 - LED
R1 - RC oscillator resistor
R2 - Master Clear resistor
R3 - LED series resistor
J1 - PIC I/O connector
J2 - DB9, 15, or 25

Vdd - plus 5 volt buss
GND - ground buss

Parts Placement:



TO-220 Regulator
REG1 = 7805T
C3 = .1 - 10uf
C4 = .01 - .1uf



TO-92 Regulator
REG1 = 78L05
C3 = .1 - 10uf
C4 = .01 - .1uf



Crystal or Ceramic Resonator
Y1 = DC - 20MHZ
C1, 2 = 5 - 22pf



RC Oscillator
5k ≤ R ≤ 100K
C1 ≥ 20pf
C2 = none

Assembly Notes:

Pin 1 of U1 is marked with a square pad.
Note polarity of Vin, REG1, LED1 and any polarized capacitors.

Don't forget to pull-up Master Clear to Vdd.
All unused inputs should be tied to Vdd or ground.

Schematic:

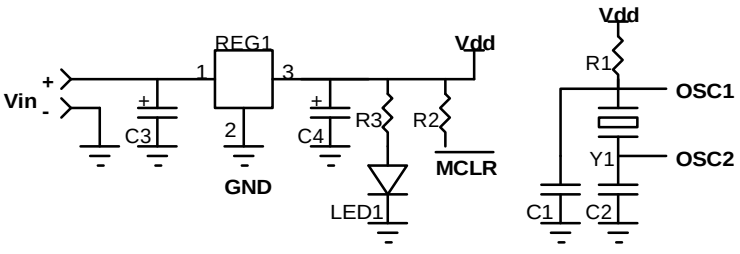

Sources:

PICmicro documentation is available from:
Microchip Technology Inc.
2355 West Chandler Blvd.
Chandler AZ 85224-6199
(602) 786-7200
www.microchip.com

microEngineering Labs, Inc.

Box 60039 Colorado Springs CO 80960 http://www.melabs.com
(719) 520-5323 (719) 520-1867 fax email: support@melabs.com